

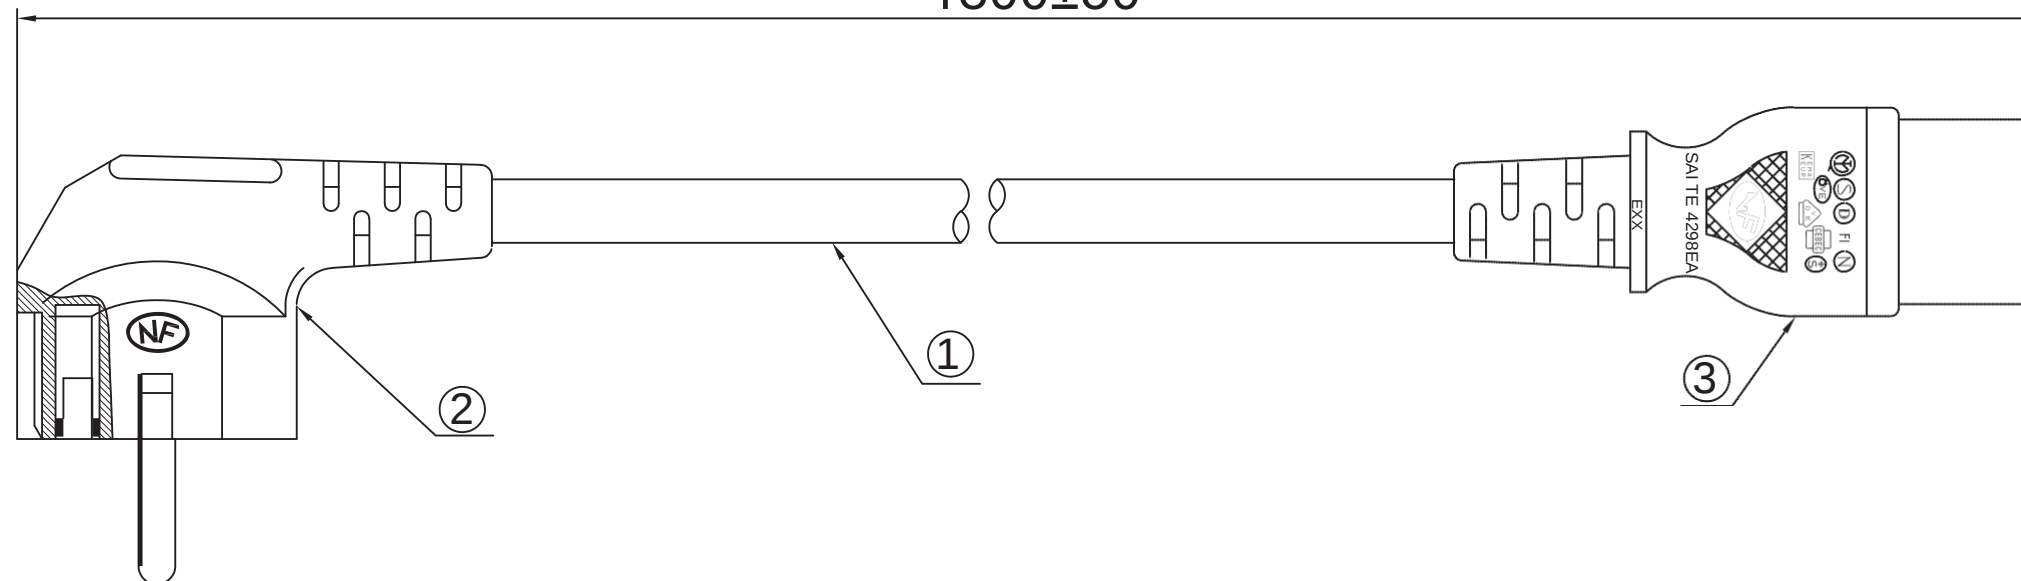
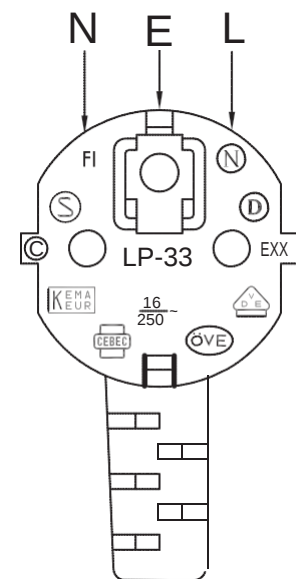


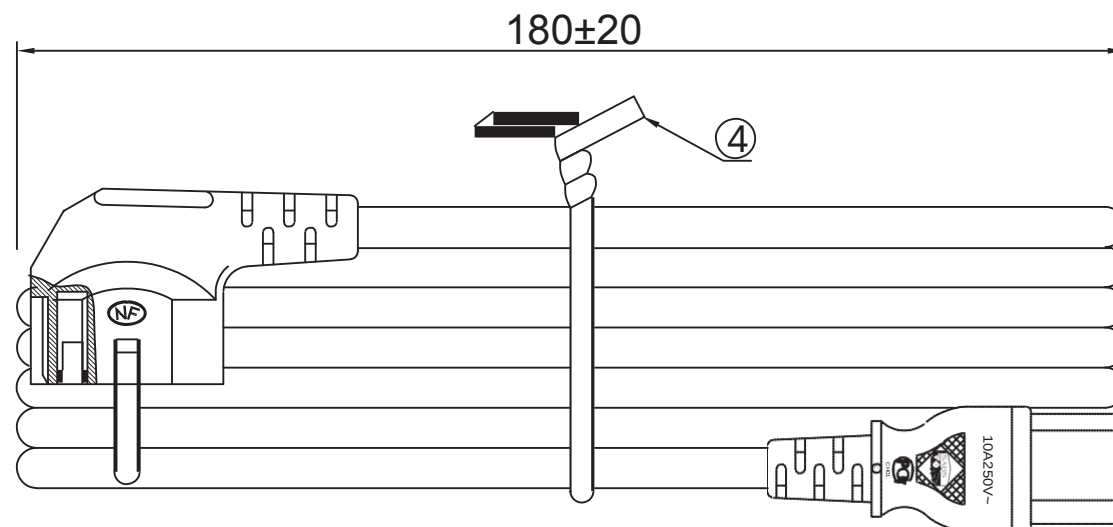

CABLE MARKING: ◀VDE▶KEMA-KEUR CEBEC IEMMEQU®(N)(S)(FI) ÖVE +++++ NF-USE-1336SABS
SAI EA TE4274 4V-75 V-75 250 /440V ORDINARY DUTY H05VV-F 3G 0.75

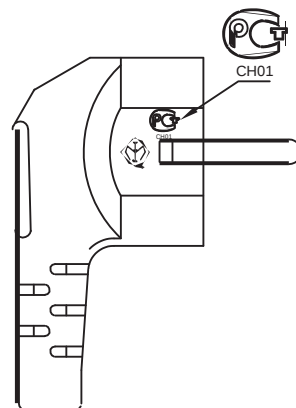

JACKET O.D.=6.6±0.15

BROWN (24/0.20)
O.D.=2.35±0.05

BLUE (24/0.20)
O.D.=2.35±0.05

YELLOW/GREEN (24/0.20)
O.D.=2.35±0.05

CROSS-SECTION VIEW

NOTES:

- 1.CABLE: THE CORD SHALL COMPLY WITH IEC60227.
- 2.PLUG: THE MOLDED PLUG SHALL COMPLY WITH IEC60884-1.
- 3.CONNECTOR: THE MOLDED CONNECTOR SHALL COMPLY WITH IEC60320-1 STANDARD(C13 CONNECTOR).
- 4.THE PRODUCT SHALL BE TESTED 100% FOR ALL SAFETY ELECTRICAL ITEMS.
- 5.COLOR: BLACK(EA0000)
- 6.PRINT: INDENT PRINT
- 7.THE PRODUCT SHOULD COMPLY WITH RoHS STANDARD.

1		Original Picture		
REV	ECN NO	DESCRIPTION	APPD.	DATE

4	PE MINI TIE: BLACK	1	EA
3	MOLDED CONNECTOR:LS-60 10A/250V	1	EA
2	MOLDED PLUG:LP-33 16A/250V	1	EA
1	H05VV-F 0.75mm 3C BLACK 6'	1	EA
ITEM	DESCRIPTION	Q'TY	U/M
Tolerance: >0±0.3 >1±0.5 >10±1 >20±2 Angle: ±1°	Approved by:	2Direct GmbH P/N: CP090	
	Checked by:		
	Drawn by: LEIB		
	Date: 2008.12.08		
Scale: X Unit: mm		DWG. NO: GL0806221	
Specification Use Only		SHEET 1 OF 1	REV: 1