
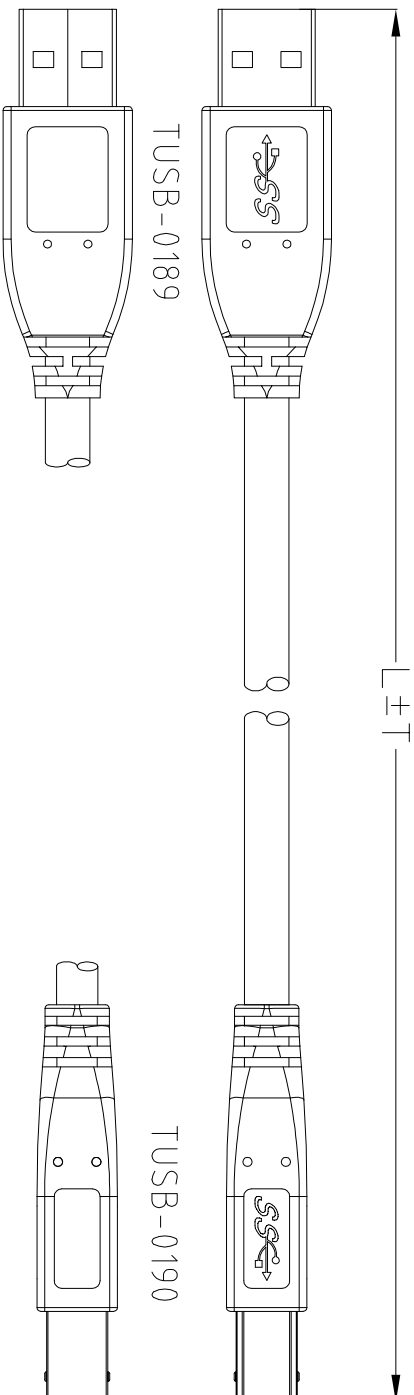



ROHS-COMPLIANT

USB 3.0 A/M 9PIN
INS:BLUE(PT 300C)

USB 3.0 B/M 9PIN
INS:BLUE(PT 300C)



NOTE:

1.CABLE: UL -2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)

+AL/My+Hot-melt-Mylar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin
+#28(7/0.127 T.C)×2C INS:Polyolefin+AL/My+B.D(85%)

PVC JACKET, OD:5.2±0.15mm COLOR:BLACK(NK-K01) REV 3.0.

2.CONNECTOR:

P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.

P2: USB 3.0 B TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.

3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01).

4.ELECTRICAL TEST:

(1)100% OPEN SHORT & MIS WIRE TEST.

(2)CONTACT RESISTANCE 3 ohm Max.

(3)INSULATION RESISTANCE 10M ohm Min.

(4)HI-POT DC300V

5.PACKING:SEE P-0210

<1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL

<2>EACH CARTON / ROHS LABEL(L×W=35×22mm)

| LTR | REV. | DESCRIPTION | DATE |
|-----|------|-------------|------|
| | | | |

| PIN | COLOR | FUNCTION |
|-------|--------|-------------------------|
| P1 1 | RED | PWR |
| 2 | WHITE | UTP_D- |
| 3 | GREEN | UTP_D+ |
| 4 | BLACK | GND_PWRrt |
| 5 | BLUE | SDP1- |
| 6 | YELLOW | SDP1+ |
| 7 | D.W | SDP1_Drain & SDP2_Drain |
| 8 | PURPLE | SDP2- |
| 9 | ORANGE | SDP2+ |
| SHELL | B.D | SHELL |

| | | | |
|------------|--------|---------|---------------|
| 170-3764-2 | CU0025 | 3000±30 | 4260113571026 |
| 170-3764-1 | CU0024 | 2000±30 | 4260113571019 |
| DWG | P/N | L±T(mm) | BAR CODE |

| | | |
|--------------------|-----------------|------------------------------|
| Tolerance Inch M/M | | Title 2DIRECT GMBH |
| X | .015 .30 | |
| XX | .010 .10 | |
| XXX | .005 .05 | |
| Draw | FANNIE 01/11/10 | Customer P/N |
| Check | | App'd |
| Engr | | Scale |
| | | Units |
| | | M/M |
| | | Third Angle Projection |
| | | REV:A |
| | | Sheet:1/1 |

| | |
|------------------------|----------|
| Dwg No. | 170-3764 |
| Customer P/N | |
| App'd | |
| Scale | NONE |
| Units | M/M |
| M/M | |
| Third Angle Projection | |
| REV:A | |
| Sheet:1/1 | |