





LogiLink®

www.LogiLink.com

Network Camera, H.264

Feature:

- 1/3" H.R. CCD image sensor
- Resolution: NTSC: 768 (H) x 494 (V), PAL: 752 (H) x 582 (V)
- Low-latency video streaming for sharp & clear images
- MPEG4, MJPEG and H.264 compression
- Hybrid Digital / Analog video output
- Motion detection and alarm notification via Email
- Supports 3G Mobile Phone Surveillance (iPhone, BlackBerry, WinCE, J2ME & Android, Symbian Support)
- Supports multiple access levels with password
- Supports up to 10 users on-line
- Complete IP surveillance system with Central Management System (CMS) software for up to 16 cameras at the same time

Specification:

specification:	
Environment	
In/Out door use	Indoor
Network	
LAN Port	YES
LAN Connection	10/100 Based-T Ethernet
Frame Rate	NTSC: 30, PAL: 25
Number of Online Users	10
Network	With 3G Mobile Phone Surveillance
• Video	
Video Compression	H.264 / MPEG4 / MJPEG
Video Remote Control	YES
Video Adjustment	Brightness, Contrast, Saturation and Hue
• Camera	
Image Sensor	1/3" High Resolution CCD image Sensor

RoHS compliant

(F







LogiLink.com

Network Camera, H.264

Specification:	
Pixels	NTSC: 768(H) x 494(V) / PAL: 752(H) x 582(V)
Lens	f3.6mm / f4.6mm
Viewing Angle	60°
Shutter Speed	1/60 (1/50) to 1/100,000 sec.
Min Illumination	1 Lux / F2.0
Video Output	1.0 Vp-p. 75Ω
BLC	AUTO
White Balance	ATW
Software	
Supported Protocols	DDNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, ICMP, SMTP, FTP, HTTP, RTP, RTSP
Security	Multiple user access levels with password protection
Web Management	YES (Control up to 16 network cameras simultaneously)
Remote Control	YES
Motion Detection	YES
Alarm and event	Image upload over FTP and Email
Notification	
Mobile	Supports 3GPP mobile surveillance
• Others	
General I/O	NO
Power	DC12V, 1A
Operating Temp.	0~40°C
Humidity	85%
Minimum	- Pentium 4 CPU 1.3 GHz or higher, or equivalent AMD
Web Browsing	I - 256 MB RAM
Requirements:	- AGP graphics card, Direct Draw, 32MB RAM - Windows 7, Vista, XP, Windows 2000 Server, ME, 98, DirectX 9.0 or later
Dimension**	- Internet Explorer 6.x or later 152.5(L) x 115.2(W) x 40.2(H)mm (6.00" x 4.54" x 1.58")
	102.0(c) × 110.2(0) × 40.2(0) min (0.00 × 4.04 × 1.00)

* The specifications are subject to change without notice.

** Dimensional tolerance: (± 5mm)












Art No. WC0010A

Network Camera, H.264

System Applications:

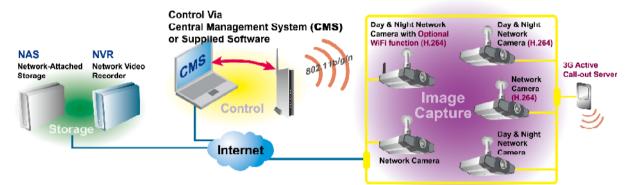

Package contents

- 1 x Network Camera
- 1 x External Power Adapter
- 1 x Bracket
- 1 x RJ-45 Network Cable
- 1 x Quick User Guide
- 1 x CD-ROM disc for user manual & licensed software "Video Viewer"

Packaging Information:

- Packing Dimension: 194x316x96 mm
- Packing Weight: 0.9kg
- Carton Dimension: 544x430x438mm
- Carton Q'ty: 20pcs
- Carton Weight: 18.22kgs



