

USB3.0 + SATA 6Gb/s Combo PCI Express Card

2-Port external USB3.0 + 2-Port internal SATA 6G/s

Features:


- True SATA 6Gb/s & USB 3.0 support: Native support PCIe Gen2 bandwidth
- PCI Express Base Specification Rev. 2.0
- PCI Express Card Electromechanical Rev. 2.0
- Serial ATA AHCI Spec. Rev.1.3
- Serial ATA Revision 3.0
- One lane PCI Express for 2.5 and 5GHz signaling
- Single virtual channel
- ECRC and Advanced Error Reporting capability
- 2 ports Serial ATA PHY for 1.5, 3.0 and 6.0GHz signaling
- Supports IDE/AHCI mode
- Supports Native Command Queue (NCQ)
- Supports Gen1m and Gen2m SATA PHY
- Supports Port Mult Compliant with Universal Serial Bus 3.0 specification Revision 1.0.
- Compliant with xHCI (eXtensible Host Controller Interface) specifications Revision 1.0.
- Supports simultaneous operation of multiple USB 3.0, USB 2.0 and USB 1.1 devices.
- Expands two external USB3.0 Super-Speed ports on the system
- Hot-swapping feature allows you to connect/disconnect devices without powering down the system









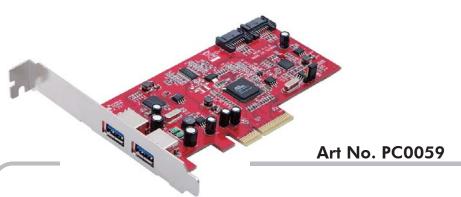

USB3.0 + SATA 6Gb/s Combo PCI Express Card

2-Port external USB3.0 + 2-Port internal SATA 6G/s

Specification:

Bus Type	PCI Express
Chipset ID	ASMEDIA ASM1061& AS1042
Number of Ports	2 external USB3.0 &2 Port Internal SATA III
Transfer Rate	SATA III transfer rate of 6.0Gbps,3.0Gbps,1.5Gbps
	Data Transfer rate of 1.5/12/480/5000 Mbps.
Dimensions	69(W) x 130(L)mm
Environment	Operating Temperature: -0°C to 50°C (32°F to 122°F)
	Storage Temperature: -20°C to 60°C (-4°F to 140°F)
OS Compatibility	Windows 2000/XP/Vista/7(32/64-bit)
	Windows Server 2003/2008
Bracket	Standard 121mm/Low profile 79.2mm

Package Content:

- 1 x PCI Express USB3.0 & SATA III card
- 1 x Driver CD
- 1 x User Manual

Packaging Information:

• Packing Dimension: 170x183x61 mm

• Packing Weight: kg

• Carton Dimension: 640x400x190 mm

Carton Q'ty: 40pcsCarton Weight: kg



