

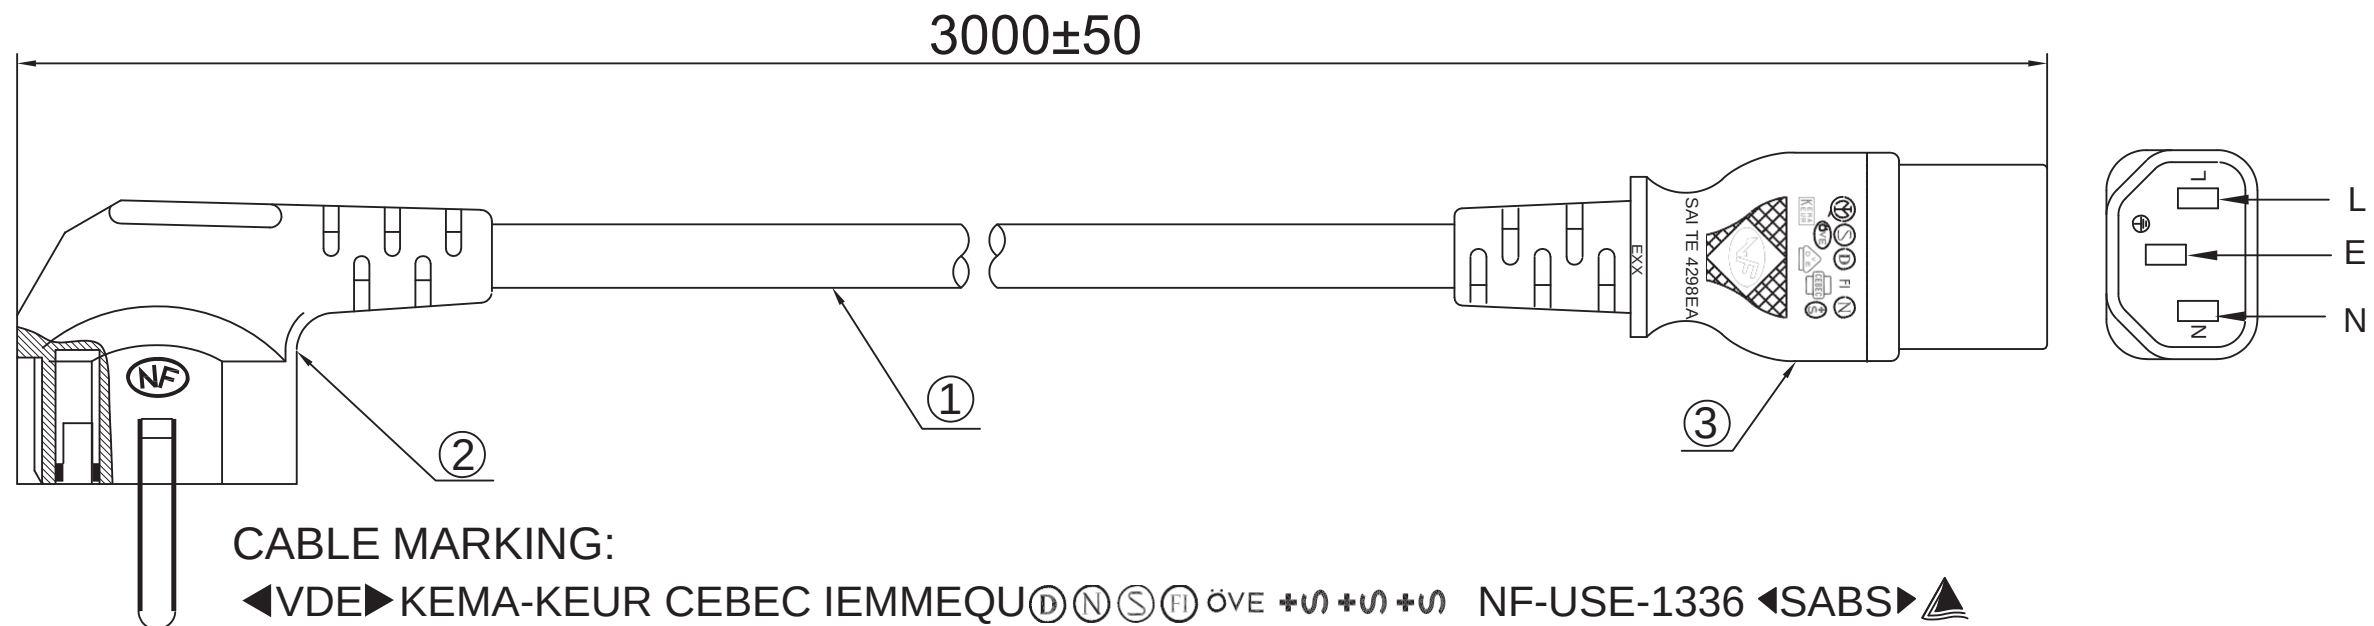
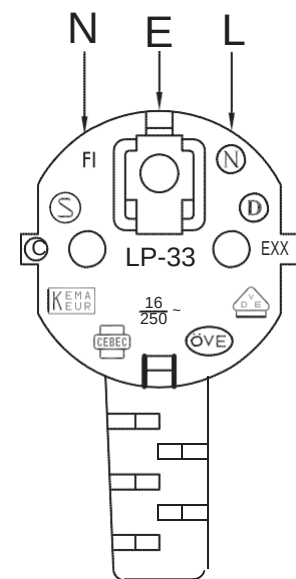
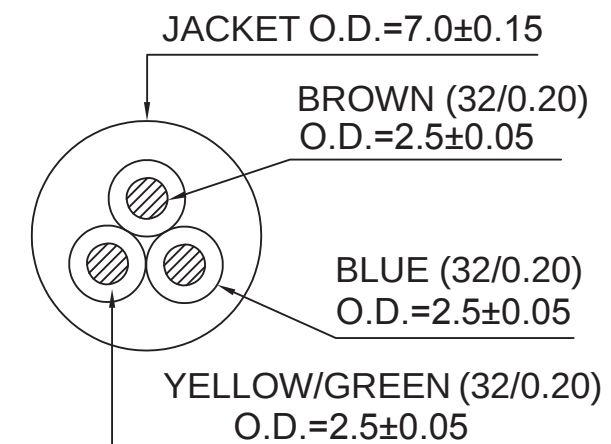


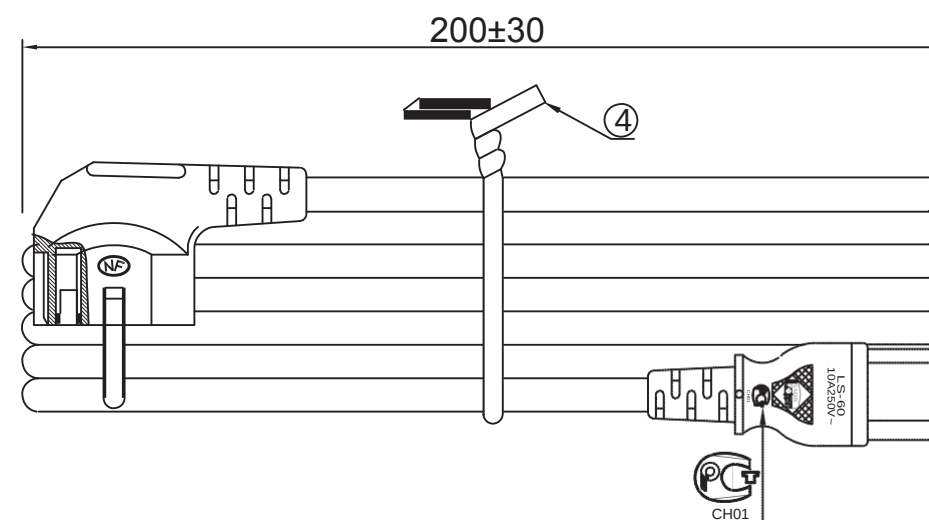

CABLE MARKING:

◀VDE▶KEMA-KEUR CEBEC IEMMEQU®(N)(S)(FI) ÖVE +++++ NF-USE-1336 ◀SABS▶  
SAI EA TE4274 4V-75 V-75 250 /440V ORDINARY DUTY H05VV-F 3G 1.00

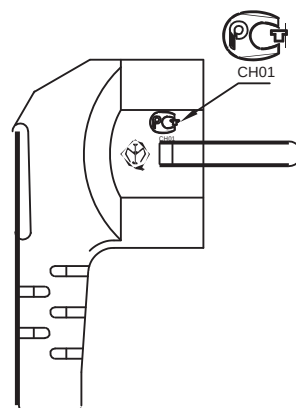

CROSS-SECTION VIEW

NOTES:

- 1.CABLE: THE CORD SHALL COMPLY WITH IEC60227.
- 2.PLUG: THE MOLDED PLUG SHALL COMPLY WITH IEC60884-1.
- 3.CONNECTOR: THE MOLDED CONNECTOR SHALL COMPLY WITH IEC60320-1 STANDARD(C13 CONNECTOR).
- 4.THE PRODUCT SHALL BE TESTED 100% FOR ALL SAFETY ELECTRICAL ITEMS.
- 5.COLOR: BLACK(EA0000)
- 6.PRINT: INDENT PRINT
- 7.THE PRODUCT SHOULD COMPLY WITH RoHS STANDARD.

| REV | ECN NO | DESCRIPTION      | APPD. | DATE |
|-----|--------|------------------|-------|------|
| 1   |        | Original Picture |       |      |

| ITEM         | DESCRIPTION                              | Q'TY         | U/M |
|--------------|------------------------------------------|--------------|-----|
| 4            | PE MINI TIE: BLACK                       | 1            | EA  |
| 3            | MOLDED CONNECTOR:LS-60 10A/250V          | 1            | EA  |
| 2            | MOLDED PLUG:LP-33 16A/250V               | 1            | EA  |
| 1            | H05VV-F 1.00mm <sup>2</sup> 3C BLACK 10' | 1            | EA  |
| Tolerance:   |                                          | Approved by: |     |
| >0±0.3       |                                          | Checked by:  |     |
| >1±0.5       |                                          | Drawn by:    |     |
| >10±1        |                                          |              |     |
| >20±2        |                                          |              |     |
| Angle:       |                                          | Date:        |     |
| ±1°          |                                          |              |     |
| Scale:       |                                          | Unit:        |     |
| X            |                                          | mm           |     |
| DWG. NO:     |                                          | GL0806836    |     |
| SHEET 1 OF 1 |                                          | REV: 1       |     |

Specification Use Only